


Technical Data




B&D PART# G2-116F

GRUNDFOS 26-116 SINGLE SPEED (230V)

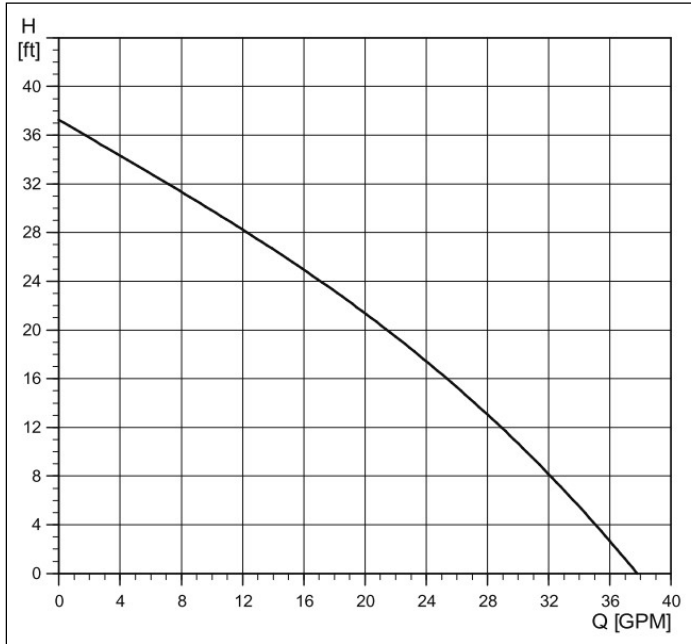


Flow Range: 0-37 gpm
Head Range: 0-37 feet
Motors: 2-pole, single-phase
Max. Liquid temperature 150 °F (65 °C)
Min. Liquid temperature 32 °F (0 °C)
Max. system pressure 145 psi (10 bar)

Volts	Amps	Watts	Hp	Capacitor
230	1.8	385	1/6	2.5uF/380V



Dimensions (inches)

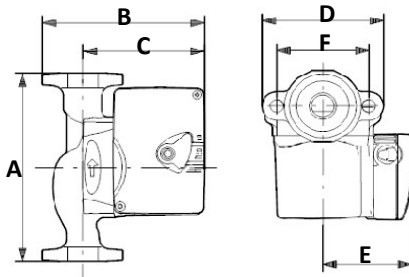

A	B	C	D	E	F	Connection type and size	Shipping weight (lbs)
6-1/2	6	4-7/8	3-1/2	3-7/16	3-5/32	GF 15/26 flange (2) 1/2" dia. bolt holes	10.30

Warranty Information: This Grundfos product comes with a 2-year warranty sold as a stand alone pump. The warranty period may not, however, exceed 30 months from the date of production.

Other Warranty Information: If sold on any of the equipment pictured below, please refer to that product warranty as it may exceed a 2-year warranty.

This Pump is Available on the Non Pressurized & Pressurized Flow Centers Pictured Below

