
# FLUSH CARTS: 1.5 HP, 2 HP

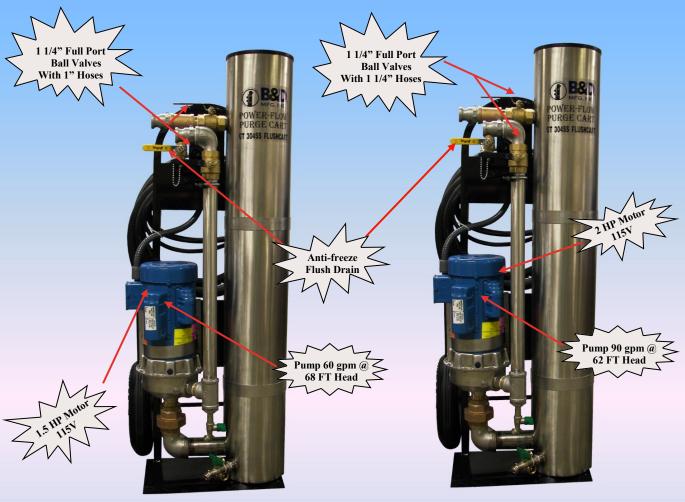

FLUSH CART 1.5HP WEIGHT: 192 lbs W/ HOSES FLUSH CART 2HP WEIGHT: 196 lbs W/ HOSES

# **Flush Cart Features**

10 Gallon Tank Volume14 Gauge Stainless Steel TankLift Out Filter ScreenFactory Mounted to Heavy Duty Cart13" Flat Free WheelsStainless Steel Piping

Quick Connect Couplings 2 - 10ft Hoses Gravity Drain / Pressure Drain

Water Tight On / Off Switch Box Hose Bracket Mount Accessories Available

Size	Part Number		
SS FLUSH CART 1.5 HP	GT304SS1.5		
SS FLUSH CART 2 HP	GT304SS2		



1-866-646-6724 712-652-3424 www.bdmfginc.com

## FLUSH CARTS: COMPONENTS & ASSESSORIES

# **Flush Cart Components**

# 2 Horse Power Purge Cart

Cart Material: Mild Steel

Tank Material: 304L Stainless Steel Piping: 304 Stainless, Red Brass

Piping Size: 1 1/4" Valves: Yellow Brass Valve Size: 1 1/4"

Drain Valves: Stainless (Hose Bib) Hoses: 150 PSI Rubber Hose

Hose Size: 1 1/4"

Pump: Refer to Add'l Page Electrical Plug: 20 Amp~115V

Hose Connections: 1 1/4" Cam and Groove

Total Weight: 196 LBS.

Dimensions: H=53" W= 22 1/2" Tank Volume: 10 Gallons

Filter: In Tank; Stainless Steel Screen Hose Parts: (1 1/4" 10 Ft Hose - Qty 2)

1" Swivel X 1-1/4" Plug (PC65S) included (See below) 1 1/4" X 1" Cam Coupling (CAM65) included (See below)

# 1 1/2 Horse Power Purge Cart

Cart Material: Mild Steel

Tank Material: 304L Stainless Steel Piping: 304 Stainless, Red Brass

Piping Size: 1 1/4" Valves: Yellow Brass Valve Size: 1 1/4"

Drain Valves: Stainless (Hose Bib) Hoses: 200 PSI Rubber Hose

Hose Size: 1"

Pump: Refer to Add'l Page Electrical Plug: 20 Amp~115V

Hose Connections: 1" Cam and Groove

Total Weight: 192 LBS.

Dimensions: H=57" W= 22 1/2" Tank Volume: 10 Gallons

Filter: In Tank; Stainless Steel Screen Hose Parts: (1" 10 Ft Hose - Qty 2)

1" Swivel X 1" Plug (PC55S) included (See below)

# See Next Page for End Suction Pump Performance & Data

#### **PURGE CART ASSESSORIES**

Size	Part Number		
1" Swivel X 1" Plug	PC55S		
1" Swivel X 1 1/4" Plug	PC65S		
1 1/4" X 1" Cam Coupling	CAM65		





CAM65

PC55S / PC65S


#### PURGE CART REPLACEMENT PARTS

Size	Part Number		
1-1/2" HP REPLACEMENT PUMP	G2ST1F4D4		
2" HP REPLACEMENT PUMP	G2ST1G4C4		
1" X (2) 10' HOSE W/CAM FITTINGS FOR FLUSH CART	GT304SS1.5HK10		
1-1/4" X (2) 10' HOSE W/CAM FITTINGS FOR FLUSH CART	GT304SS2HK10		



## **FLUSH CARTS: SUBMITTAL DATA**

#### **2 Horse Power Motor**

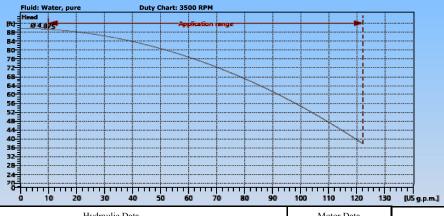

Hydraulic Data			Motor Data	NIDE M. J.1	Ownetites		
Maximum Flow	Flow at Duty Point	Maximum TDH	TDH at Duty Point	NPSH g	Voltage/Phase/Enclosure	NPE Model	Quantity
122 US g.p.m.	0 US g.p.m.	90 ft	0 ft		115V 1Ph TEFC	2ST1G4C4	1

#### Pump Technical Data


Pump Code: 2ST1G4C4
System Input Power: 1~115V
Electrical Enclosures: TEFC

Impeller Size: 4-7/8"
Impeller Type: Radial impeller

Max. Temperature: 400°F Max. Frequency: 60 HZ Motor Standard: NEMA

Sense of Rotation: Clockwise from the drive end Impeller Material: AISI 316 Stainless Steel

## 1 1/2 Horse Power Motor

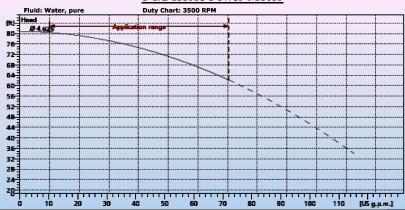

I		Hydraulic Data				Motor Data	NDE W. L.I.	0 11
Γ	Maximum Flow	Flow at Duty Point	Maximum TDH	TDH at Duty Point	NPSH g	Voltage/Phase/Enclosure	NPE Model	Quantity
Γ	113 US g.p.m.	0 US g.p.m.	81 ft	0 ft		115V 1Ph TEFC	2ST1F4D4	1

#### **Pump Technical Data**

Pump Code: 2ST1F4D4

System Input Power: 1~115V

Electrical Enclosures: TEFC

Impeller Type: Radial impeller

Impeller Construction: Closed

Max. Temperature: 400°F

Max. Frequency: 60 HZ

Motor Standard: NEMA

Impeller Size: 4-5/8"

